



## LIMITED LIFETIME WARRANTY

Compass Manufacturing International warrants to the original consumer purchaser that the faucet be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet was first installed.

In the event that Freendo faucets are used in a Commercial Application, this warranty is limited for a period of 5 years, unless otherwise specifically stated in the catalog and/or price book.

Compass Manufacturing International will replace, free of charge, during the applicable warranty period, any part or finish that proves defective in material and/or workmanship under normal installation, use and service. This warranty shall not apply to goods which have been subject to accidents, negligence or improper installation. Compass Manufacturing International will not be liable for other damages or losses, including, but not limited to: labor charges and/or damages incurred in installation, repair or replacement as well as any other kind of loss or damage. Proof of purchase from the original consumer purchaser must be made available for all warranty claims.

Compass Manufacturing International recommends using a professional plumber for all installation and repair. Compass Manufacturing International will, at its discretion, provide replacement parts for installation by consumer for any parts that prove defective under normal usage and service with new or equivalent parts. Replacement parts may be obtained by emailing the address below, calling the number below or by writing to:

### Compass Manufacturing International

Freendo Product Service  
6702 Enterprise Drive  
Louisville, KY 40214  
800.626.3525

[warranty@cmiproduct.com](mailto:warranty@cmiproduct.com)

Revised 10/13/16

[warranty@cmiproduct.com](mailto:warranty@cmiproduct.com)

© Compass Manufacturing International

800.626.3525



Model No. : 191-6576 Polished Chrome  
191-6577 Brushed Nickel **Spotless PVD™**



## Single Handle Pull-out Kitchen Faucet

3 Hole or Single Hole Installation



## Helpful Information


### Helpful Tools

#### Tools:

Gather the necessary tools as shown below to complete the installation of this faucet. Some may not be needed depending on the model of faucet you are installing. Check with your local hardware store on the requirements of your installation situation.



Plumbers Putty



Flashlight



Basin Wrench



Safety Glasses



Screwdriver



Pliers



Channel Locks



Adjustable Wrench


## 5

## Parts List


28	Plastic Base
27	Weight
26	Allen Key
25	Protective Sleeve
24	Screw
23	Locknut
22	Clamp
21	Putty Plate
20	Deck Plate
19	O-ring
18	Shank
17	Hub Base
16	Spray
15	Pull-out Hose
14	Spout Hub Bushing
13	Spout
12	O-ring
11	Wearing Ring
10	Cartridge Sleeve
9	Quick Connect Assembly
8	Waterway
7	O-ring
6	Cartridge
5	Cartridge Locknut
4	Trim Cap
3	Handle
2	Set Screw
1	Index
<b>No.</b>	<b>Part Name</b>

**4**

## Parts Diagram

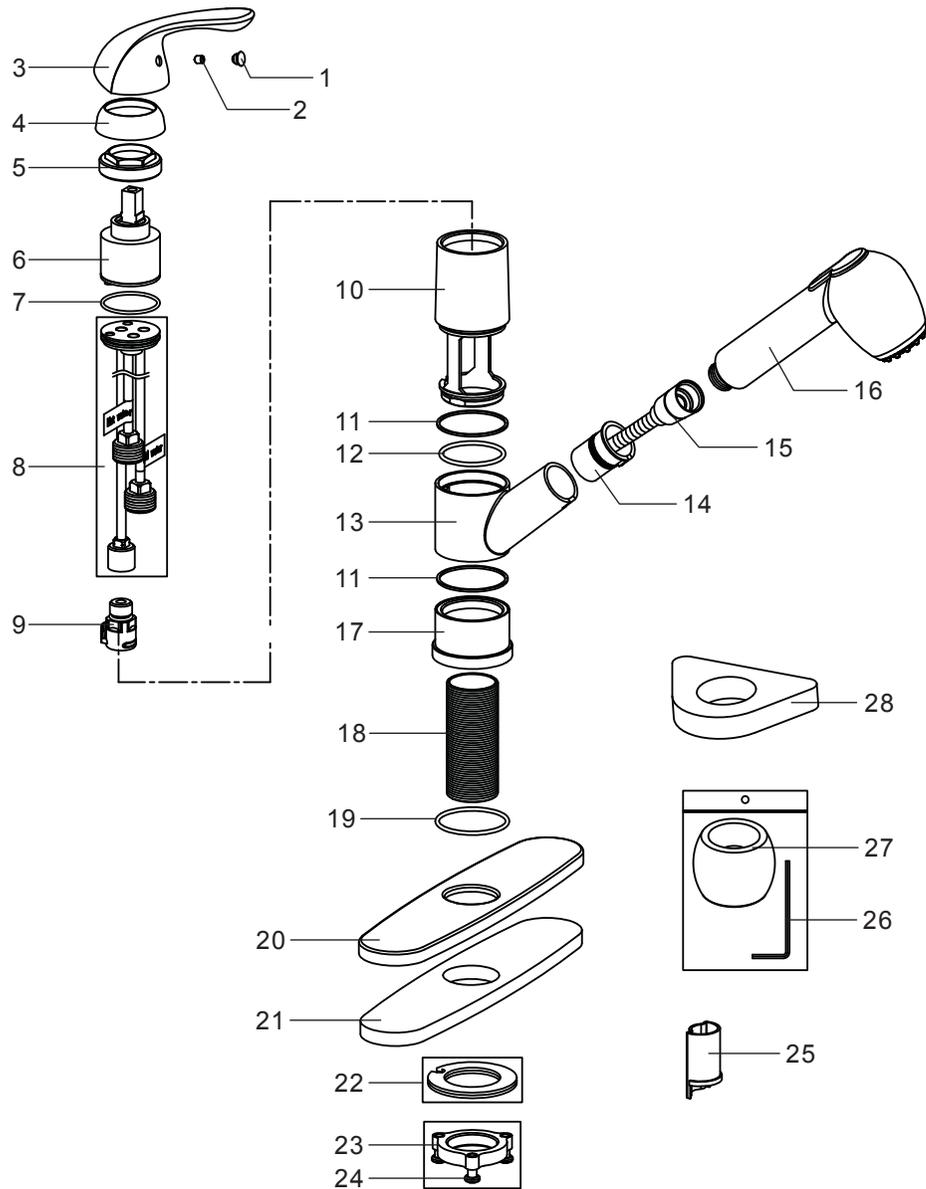**1**


## Faucet Installation

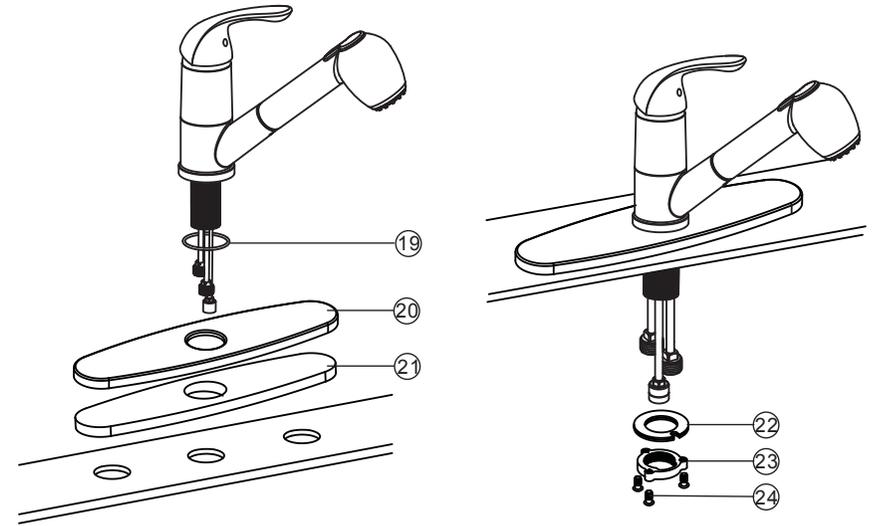

1. Position the faucet, deck plate ⑳ and putty plate ㉑ in order on the countertop as shown. Don't forget the O-ring ⑲.
2. Assemble clamp ㉒ and locknut ㉓ to faucet shank by hand and tighten the screws ㉔ with screwdriver.

**2**


## Pull-Out Hose Installation

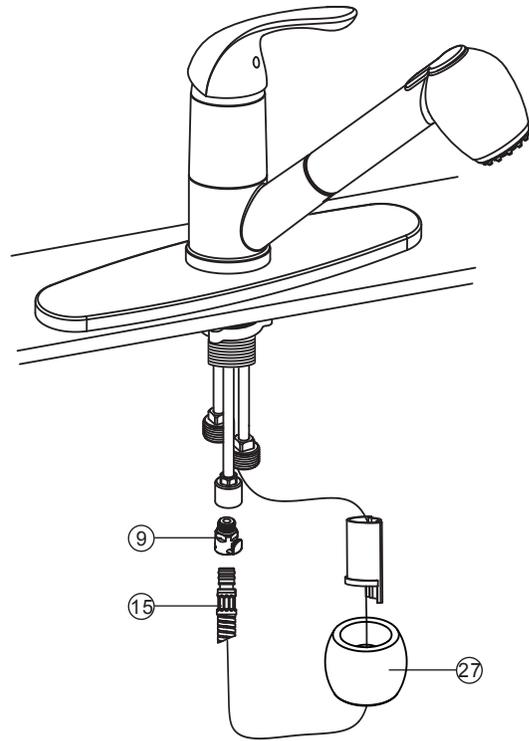

3. Fix the weight ⑳ to the pull-out hose ⑮, and connect the pull-out hose ⑮ to quick connect assembly ⑨. **CAUTION: MAKE SURE THE HOSE IS PROPERLY ENGAGED AND SECURED IN THE QUICK CONNECT ASSEMBLY.**

**3**


## Configuration

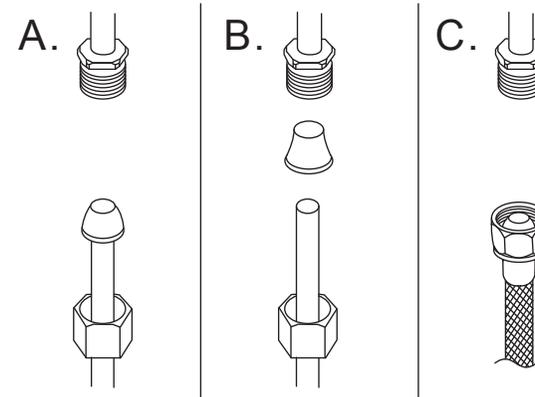


**Warning:**  
The supply valves and supply lines are not included.

Connect to water supply lines with either:

- (A) 3/8" O.D. Copper tubing (ball nose risers with the coupling nuts or;
- (B) 3/8" Copper tubing (no ball) with supplied tube head interior connector or;
- (C) IPS faucet connectors (1/2" )

**Important:**

Tighten connection with two wrench to prevent damage to tube body. Be careful not to bend the stem as this will void the product warranty.

**Important:**

Remove the spray head and let both hot and cold water run for one minute. To clear any line trash. This will help clean any debris that might clog the system. Re-assemble spray head.

**Test system for leaks .**