



Model No. : 192-6637 Polished Chrome



**Commercial 4 " Center-set Single Handle
Lavatory Faucet with 17 Gauge Grid Top Drain**
Fits 3 Hole Sink



Helpful Information

Helpful Tools

Tools:

Gather the necessary tools as shown below to complete the installation of this faucet. Some may not be needed depending on the model of faucet you are installing.



Plumber's Putty
and/or Silicone



Flashlight



Basin Wrench



Safety Glasses



Screwdriver



Pliers



Channel Locks



Adjustable Wrench



LIMITED LIFETIME WARRANTY

Compass Manufacturing International warrants to the original consumer purchaser that the faucet be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet was first installed.

In the event that Freendo faucets are used in a Commercial Application, this warranty is limited for a period of 5 years, unless otherwise specifically stated in the catalog and/or price book.

Compass Manufacturing International will replace, free of charge, during the applicable warranty period, any part or finish that proves defective in material and/or workmanship under normal installation, use and service. This warranty shall not apply to goods which have been subject to accidents, negligence or improper installation. Compass Manufacturing International will not be liable for other damages or losses, including, but not limited to: labor charges and/or damages incurred in installation, repair or replacement as well as any other kind of loss or damage. Proof of purchase from the original consumer purchaser must be made available for all warranty claims.

Compass Manufacturing International recommends using a professional plumber for all installation and repair. Compass Manufacturing International will, at its discretion, provide new or equivalent replacement parts for any product that proves to be defective under normal usage and service. Replacement parts may be obtained by emailing the address below, calling the number below or by writing to:

Compass Manufacturing International

Freendo Product Service

6702 Enterprise Drive

Louisville, KY 40214

800.626.3525

warranty@cmiproduct.com

Revised 9/27/17


warranty@cmiproduct.com

© Compass Manufacturing International

800.626.3525

4


Parts Diagram / List

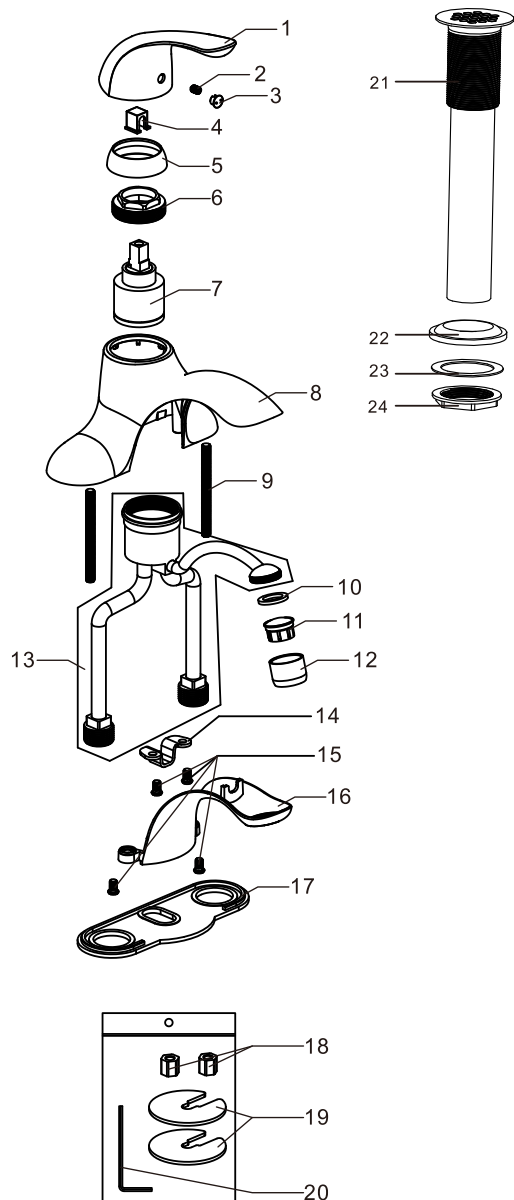


24	Locknut
23	Bottom rubber washer
22	Top rubber washer
21	Drain body
20	Allen Key
19	Clamp
18	Locknut
17	Putty Plate
16	Under Cover
15	Screw
14	Cartridge Retainer
13	Waterway
12	Aerator Collar
11	Aerator Core
10	Washer
9	Bolt
8	Upper Cover
7	Cartridge
6	Cartridge Locknut
5	Trim Cap
4	Cartridge Adapter
3	Index
2	Set Screw
1	Handle
No.	Part Name

1

Preparation / Mounting

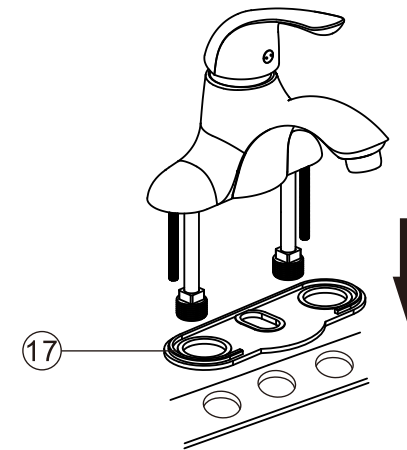

1. Put faucet body, putty plate ⑰ in order on the counter.

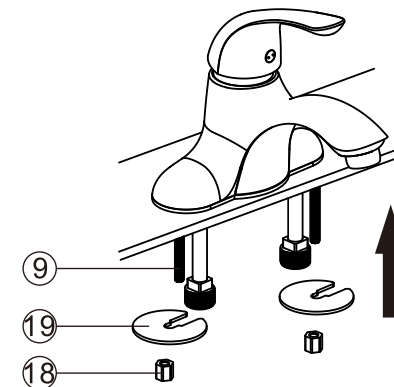


2. Assemble clamp ⑲ and locknut ⑱ to the bolt ⑨ and tighten the locknut with appropriate tool.

2

Grid Drain Installation

Instruction for product with drain option only

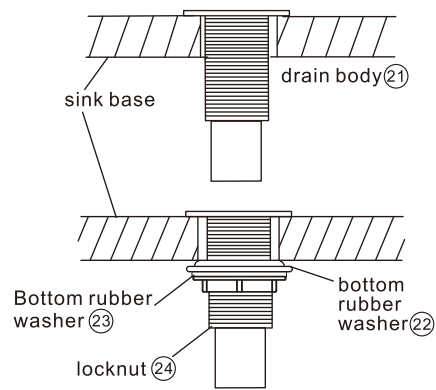


A. Insert the drain body (21) from underneath the sink drain hole.

B. Slide top rubber washer and (22) bottom rubber washer (23) on drain body up against bottom of sink. Tighten locknut (24) firmly against base for tight seal.

3


Configuration

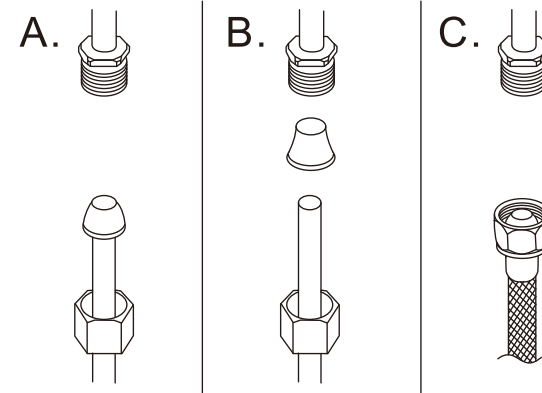

Warning:
The supply valves and supply lines are not included.


Connect to water supply lines with either:

- (A) 3/8" O.D. Copper tubing (ball nose risers with the coupling nuts or;
- (B) 3/8" Copper tubing (no ball) with supplied tube head interior connector or;
- (C) IPS faucet connectors (1/2")



Important:

Tighten connection with two wrench to prevent damage to tube body. Be careful not to bend the stem as this will void the product warranty.



Important:

Remove the aerator and let both hot and cold water run for one minute. This will help clean any debris that might clog the system. Re-assemble aerator.

Test system for leaks .